

**SMOOTHER
WORKING**



Bona Extender

Part of the **Bona Additive+** range

- ✓ Extends open time
- ✓ Ready to mix
- ✓ For primers & lacquers

0,2L

Bona[®]

Bona **Extender**

BONA ADDITIVE+ RANGE – ENHANCEMENTS FOR BONA PRIMERS & LACQUERS

Bona[®]




Bona Extender

Smoother working

Bona Extender is an additive that improves levelling and prolongs the open time of Bona waterborne finishes, primers and paints. It is designed for use when indoor humidity is low and/or the room temperature is higher than normal.

Bona Extender extends open time, enabling contractors to work at a steady, comfortable pace with enhanced control. This minimises stress during application and ensures a more consistent, professional result.

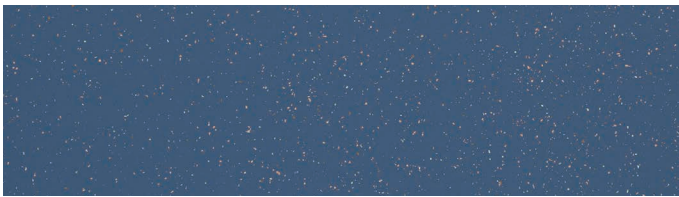

More controlled application on wood and resilient floors.



Reducing the risk of overlap marks.

KEY BENEFITS

- Facilitates application in warm/dry climates
- For wood and resilient floors
- Prolongs open time
- Improves levelling properties

APPLICATION

Bona Waterborne Lacquers & Primers, Bona Pure Colour & Bona SuperSport Zone Paint:

1. Add maximum 4% (200ml to 5L) Bona Extender to the coating and shake thoroughly.
2. Apply coating mixed with Bona Extender as normal according to the instructions on each product's technical data sheet.

Bona SuperSport Line Paint:

Add up to 10% Bona Extender to the paint and stir thoroughly before use. Use as normal.

TECHNICAL DATA

Mixing ratio:	Lacquers & primers: max 4% (one bottle per 5 L), Line Paint: max 10%
Safety:	Unclassified.
Flash point:	Non-flammable.
Shelf life:	2 years from the date of production, in unopened original container.
Disposal:	Empty containers should be recycled. Liquid waste must be disposed of at an approved waste disposal facility - do not pour down drains or sewers. Follow all local waste regulations.
Storage/transport:	The temperature must not fall below +5°C or exceed +30°C during storage or transportation.
Pack size:	200 ml.

Additional detailed information is noted in the appropriate Technical Data Sheet.